

Requested Patent: EP0800320A2

Title:

DEALER-LOCATOR SERVICE AND APPARATUS FOR A MOBILE
TELECOMMUNICATIONS SYSTEM ;

Abstracted Patent: EP0800320 ;

Publication Date: 1997-10-08 ;

Inventor(s): HANSON THOMAS C (US) ;

Applicant(s): LUCENT TECHNOLOGIES INC (US) ;

Application Number: EP19970302011 19970325 ;


Priority Number(s): US19960628355 19960405 ;

IPC Classification: H04Q7/22 ;

Equivalents: AU1664697, AU720188, CA2199879, JP10051859, US5963861

ABSTRACT:

A dealer-locator service is provided to mobile telephones (40) in a mobile telecommunications system. When a mobile telephone initiates a call to the dealer-locator service, a mobile telephone switching office (MTSO 41) identifies the one of a plurality of base stations (20-23) through which the call is made. A dealer-locator service apparatus (43-45) then uses this base-station identification, rather than the telephone number of the calling mobile telephone, to look up in a dealer-locator database the one of a plurality of business locations of the dealer that is in the vicinity of the identified base station, and hence in the vicinity of the calling mobile telephone. The apparatus then reports the address of the one business location to the caller, and optionally also causes the MTSO to connect the call to a telephone number of the one business location. The dealer-locator database may be programmed by individually calling the dealer-locator service from each dealer business location via a mobile telephone that is positioned at that dealer business location and supplying that location's address and phone number. The apparatus records the identity of the base station through which the call was made along with the supplied information in the database.



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 800 320 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
08.10.1997 Bulletin 1997/41

(51) Int Cl.⁶: H04Q 7/22

(21) Application number: 97302011.8

(22) Date of filing: 25.03.1997

(84) Designated Contracting States:
DE ES FR GB IT

(72) Inventor: Hanson, Thomas C.
Boulder, Colorado 80303 (US)

(30) Priority: 05.04.1996 US 628355

(74) Representative:
Buckley, Christopher Simon Thirsk et al
Lucent Technologies (UK) Ltd,
5 Mornington Road
Woodford Green, Essex IG8 0TU (GB)


(71) Applicant: LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)

(54) Dealer-locator service and apparatus for a mobile telecommunications system

(57) A dealer-locator service is provided to mobile telephones (40) in a mobile telecommunications system. When a mobile telephone initiates a call to the dealer-locator service, a mobile telephone switching office (MTSO 41) identifies the one of a plurality of base stations (20-23) through which the call is made. A dealer-locator service apparatus (43-45) then uses this base station identification, rather than the telephone number of the calling mobile telephone, to look up in a dealer-locator database the one of a plurality of business locations of the dealer that is in the vicinity of the identified base station, and hence in the vicinity of the calling mo-

bile telephone. The apparatus then reports the address of the one business location to the caller, and optionally also causes the MTSO to connect the call to a telephone number of the one business location. The dealer-locator database may be programmed by individually calling the dealer-locator service from each dealer business location via a mobile telephone that is positioned at that dealer business location and supplying that location's address and phone number. The apparatus records the identity of the base station through which the call was made along with the supplied information in the database.

FIG. 1

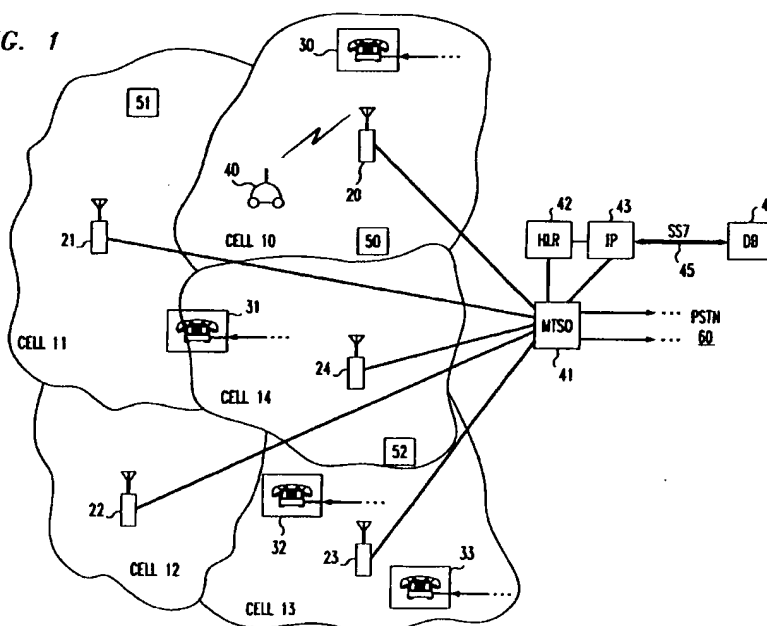

EP 0 800 320 A2

Description

Technical Field

This invention relates to mobile wireless telecommunications systems.

Background of the Invention

The dealer-locator service connects a caller to the one of a plurality of business locations of the called party (the "dealer") which is closest to the caller. The dealer-locator service is well-known for stationary calling stations (i.e., conventional wired-in-place telephones). The service uses the calling telephone number to determine the caller's geographical location, and from that information determines the called party's business location that is geographically closest to the caller. Illustrative implementations of the dealer-locator service are disclosed in U.S. Patents No. 4,757,267 and 5,136,636.

While the known dealer-locator service works well for stationary communications stations, it is practically useless for mobile (i.e., portable) communications stations, such as mobile cellular radiotelephones and personal communications services (PCS) wireless handsets. The reason is that the known service uses the calling station's telephone number to derive the caller's geographical location. But the geographical location of a mobile station changes while its telephone number remains the same. Hence, the telephone number of a mobile station is not representative of its location.

Schemes for determining the geographical location of a mobile station are known. One scheme, disclosed in U.S. Patent No. 5,293,645, uses relative transmission-propagation delays from a mobile station to a plurality of base stations to determine the mobile station's location by using triangulations or other geographical intersection techniques. Consequently, this scheme works only when the mobile station is in simultaneous communication with a plurality (generally at least three) of base stations. Another scheme, disclosed in U.S. Patent No. 5,479,482, equips each mobile station with a global satellite positioning (GPS) device that determines and reports the mobile station's geo-coordinates, which can then be converted into location information. Consequently, this scheme works only for specially-equipped mobile stations, but not for conventional mobile stations without a GPS device. Neither scheme is therefore useful for implementing a ubiquitous dealer-locator service for conventional mobile telecommunications systems.

Summary of the Invention

This invention is directed to solving these and other problems and disadvantages of the prior art. Generally according to the invention, when a mobile terminal initiates a call to a dealer-location service, an identification of the base station through which the call is made, rather

than the telephone number of the calling station, is used to determine a business location of the dealer that is in the vicinity of the calling station. The address of the determined location is then reported to the caller, and/or the call is extended to the determined location.

According to one aspect of the invention, in a mobile communications system that includes at least one mobile communications station and a plurality of base stations each for communicating with mobile communications stations in a different geographical area, a dealer-locator arrangement serves a plurality of business locations of a service provider that are located in a plurality of the geographical areas. In response to a communication from a mobile communications station that identifies the service provider, the arrangement determines which one of the plurality of base stations is presently communicating with the mobile communications station. Illustratively, this determination is accomplished by the mobile communications system's switching center, or MTSO. The arrangement then uses this determination to determine which one of the plurality of business locations is within a vicinity of the one base station. Illustratively, this is effected via a database lookup in a database whose contents correlate the base stations each with at least one of the business locations that is in the vicinity of the base station. The arrangement then either causes the determined business location (e.g., its address) to be reported to the mobile communications station, or causes a communication (e.g., a phone call) from the mobile communications station to be extended to the determined business location (e.g., to a telephone number that is associated in the database with that business location), or both.

The user of the mobile communications station is thus informed of the whereabouts of, or is connected to, a business location of the service provider that is likely to be one of the closest, if not the closest, to the user at the present time, even though the user is on the move wherefore the user's own geographical position cannot be determined from the user's calling telephone number.

These and other advantages and features of the present invention will become more apparent from the following description of an illustrative embodiment of the invention considered together with the drawing.

Brief Description of the Drawing

FIG. 1 is a block diagram of an illustrative mobile telecommunications system that includes an illustrative embodiment of the invention;

FIG. 2 is a block diagram of records of a home location register database of the system of FIG. 1;

FIG. 3 is a block diagram of databases of a dealer locator database of the system of FIG. 1;

FIGS. 4-5 are a functional flow diagram of operations of the system of FIG. 1 in effecting the illustrative embodiment of a dealer-locator service; and

FIG. 6 is a functional flow diagram of operations of the system of FIG. 1 in programming a database of FIG. 3.

Detailed Description

FIG. 1 shows a mobile wireless telephone system comprising a mobile telephone switching center or office (MTSO) 41 connected to the public service telephone network (PSTN) 60 and to a plurality of base stations 20-24, and providing through each base station 20-24 radiotelephone service to mobile telephones 40 in the base station's geographical service area (cell) 10-14, respectively. Associated with MTSO 41 is a home location register database (HLR) 42 of conventional call records of active calls. As shown in FIG. 2, for each active call, MTSO 41 conventionally creates in HLR a record 201 that contains at least a call identifier (ID) entry 202 by which MTSO 41 distinguishes the call from other calls, a telephone number entry 203 of the calling or called mobile telephone 40 that is involved in the identified call, and a base station ID entry 204 of one of the base stations 20-24 that is presently serving the identified mobile telephone 40 during the identified call. Mobile telephones 40 need not have this MTSO 41 as their home MTSO; they can be roaming units outside of their home area.

Located in various places within the geographical areas served by base stations 20-24 are multiple business locations of various service providers ("dealers"). For purposes of this application, a service provider is defined broadly to encompass substantially any multi-location entity or group of entities. For example, a service provider may be a particular pizza restaurant chain, automobile gas and service stations of one or more oil companies, police stations, automatic teller machines (ATMs) of one or more banks, etc. For ease of illustration, FIG. 1 shows four locations 30-33 of one service provider and three locations 50-52 of a second service provider. Some service locations (e.g., pizza restaurants) may have associated telephones, while other service locations (e.g., ATMs) may not have associated telephones. In this illustrative example, locations 30-33 are assumed to be equipped with telephones, while locations 50-52 are assumed to not be equipped with telephones.

According to the invention, there is provided in the system of FIG. 1 an intelligent peripheral (IP) 43, such as a Lucent Technologies Inc. Conversant® interactive voice response system, and a dealer-locator database (DB) 44 which provide dealer-locator services to mobile telephones 40. IP 43 may be connected directly to MTSO 41 and HLR 42 and function as an adjunct processor thereof. Alternatively, IP 43 may be located remotely from MTSO 41 and HLR 42 and be respectively connected thereto via telephone lines of PSTN 60 and a signaling system 7 (SS7) link. IP 43 may also be co-located with and directly connected to DB 44, but is pref-

erably connected to DB 44 via an SS7 link 45. IP 43 is a stored-program-controlled machine that conventionally includes an interface for communicating with other entities of the system of FIG. 1 and including speech recognition and speech synthesis circuitry such as a digital signal processor (DSP), a memory for storing control programs, and a control processor which executes the control programs out of memory to control the operation of IP 43.

As shown in FIG. 3, DB 44 comprises a collection of one or more databases 300-301, one for each service provider served by the system of FIG. 1. For example, DB 44 comprises a database 300 for a service provider 3 (e.g., a pizza restaurant chain) and a database 301 for a service provider 5 (e.g., an ATM provider). Each database 300-301 comprises a plurality of records 302 that correlate base stations with a dealer's business locations. Each record 302 has at least an entry 303 containing the ID of a base station 20-23 and an entry 304 containing the address of a location 30-33 or 50-52 of the corresponding service provider that lies in the vicinity of the identified base station 20-23. If the service provider's locations 30-33 have telephones, each record 302 further has an entry 305 containing the telephone number of the corresponding location's telephone.

FIG 4 shows the interactions of elements 40-44 of FIG. 1 in providing the dealer-locator service according to this invention. To access the dealer locator service, a user of a mobile telephone 40 conventionally calls the telephone number that is assigned to the dealer locator service, at step 400. The called number may be either a general number for the dealer locator service, or it may be a number for the dealer locator service of a particular one of the service providers for whom the dealer locator service is being provided. Illustratively, these numbers may be "800"-type service numbers. Alternatively, they may be telephone numbers or extension numbers of MTSO 41.

MTSO 41 receives the call generated by mobile telephone 40 at step 400 through one of the base stations 20-23, at step 402, and in response creates a call record 201 for the call in HLR 42, at step 404. As a part of step 404, MTSO 41 assigns a unique call ID to the call. If the called number is not for the dealer locator service, as determined at step 406, MTSO 41 handles the call conventionally, at step 408. If it is determined at step 408 that the called number is for the dealer locator service, MTSO 41 connects the call to IP 43, at step 410. As part of that connection, MTSO 41 passes the call ID to IP 43. IP 43 receives the call and the call ID, at step 412, and in response sends a request to HLR 42 for the call's record 201, at step 414. The request identifies the call by the call ID. HLR 42 receives the request, at step 416, and in response retrieves and returns the call's record 201 to IP 43, at step 418. IP 43 receives the call record 201, at step 420, and checks entry 203 thereof to determine if the called number is of the generic dealer-locator service or if it identifies a specific service provider, at

step 422. If the called number is the generic dealer-lo-
 cator service number, IP 41 generates a query to the
 caller via the existing call requesting the caller to identify
 the desired service provider, at step 424. Illustratively,
 the query is a recorded announcement that is played by
 IP 43, and the expected response is either a touch-tone
 signal selecting an item from a menu, or a spoken name
 of the desired service provider (e.g., "ATM machine",
 "Luigi's pizza", "service station", etc.) The caller re-
 ceives the query, at step 426, and in response provides
 the requisite response, at step 428, which is received
 by IP 43, at step 430. In response to step 430, or if it
 was determined at steps 422-423 that the called number
 is for a specific service provider, IP 43 sends a query to
 DB 44, at step 432. This query contains a service pro-
 vider ID, and the base station ID from the call record
 201. DB 44 receives the query, at step 434. It uses the
 service provider ID to select a corresponding one of the
 databases 300-301, and uses the base station ID to se-
 lect a corresponding record 302 from the selected da-
 tabase. If there is more than one record 302 for the base
 station ID, DB 44 selects one of them according to some
 desired selection criteria. For example, the selection
 could be random. Alternatively, the selection may be
 done on a round-robin basis for sequential calls. Fur-
 thermore, if the identified base station uses multiple di-
 rectional antennas to serve different sectors of its cell
 (e.g., a CDMA system), the selection may be based on
 which of the antennas is serving the call. DB 44 then
 returns the selected record 302 to IP 43, at step 436. IP
 43 receives the record 302, at step 438, and reports the
 contents of that record's dealer location address entry
 304 to the caller, at step 440. Illustratively, IP 43 voices
 the record contents to the caller via conventional text-
 to-speech conversion. Alternatively, record 302 may
 contain a recorded speech file, in which case IP 43
 merely plays back record 302 to the caller. The caller
 receives this information, at step 442, and becomes in-
 formed thereby of a geographically-proximate location
 of the desired service provider.

IP 43 also checks entry 305 of the received record
 302 to determine if it contains a telephone number, at
 step 443. If not, its job is done, and so IP 43 causes
 MTSO 41 to end the call with the caller, at step 444. If
 the received record 302 contains a phone number in en-
 try 305, IP 43 queries the caller for whether the caller
 desires to have that number called, at step 446. The call-
 er receives the query, at step 448, and returns a re-
 sponse indicating his or her desire, at step 450. IP 43
 receives the response, at step 452, and determines
 therefrom the caller's desire, at step 454. If the caller
 does not desire to have the service provider called, IP
 43 causes MTSO 41 to end the call with the caller, at
 step 456. If the caller desires to have the service pro-
 vider called, IP 43 provides the service provider's
 number to MTSO 41 and requests MTSO 41 to extend
 the call to that number, at step 458. MTSO 41 receives
 the request, at step 460, and in response effects a trans-

fer of the call in a conventional manner, at step 462.

Databases 300-301 of dealer locator database 44
 may be populated with data in any desired manner. One
 such manner is shown in FIG. 6. An administrator of DB
 44 takes a mobile telephone 40 to a location 30-33 or
 50-52 of the service provider whose database 300-301
 is being administered, at step 600. The administrator
 then calls from that location a telephone number that is
 assigned for administration of the subject database
 300-301, and the call is connected through one of the
 base stations 20-24 and MTSO 41 to IP 43, in the man-
 ner shown at steps 400-422 of FIG. 4 and described
 above. At step 423, IP 43 recognizes the called number
 as indicating administration of the subject database
 300-301, and in response proceeds to step 602 of FIG.
 6. At step 602, IP 43 queries the caller for authorization
 (e.g., a password) to program the subject database
 300-301. The administrator receives the query, at step
 604, and responds with an authorization code, at step
 606. IP 43 receives the authorization code, at step 608,
 and checks whether it is a valid authorization for admin-
 istering the subject database 300-301, at step 610. If the
 authorization is not valid, IP 43 ends the call, at step
 612. If the authorization is valid, IP 43 queries the ad-
 ministrator for the address of the location from which the
 administrator is calling, at step 614. The administrator
 receives the query, at step 616, and in response speaks
 the address, at step 618. Alternatively, if mobile tele-
 phone 40 is equipped with a keyboard and a modem,
 the administrator types in the address on the keyboard.
 IP 43 receives and stores the address, at step 620, and
 then queries the administrator for a phone number of
 the service provider's location, at step 622. The admin-
 istrator receives the query, at step 624, and responds
 with either the location's phone number or an indication
 that there is no corresponding phone number, at step
 626. The administrator then moves on to a next location
 of the service provider, returning to step 600 to repeat
 the above-described process.

IP 43 receives and stores the administrator's re-
 sponse, at step 628. IP 43 then sends an administration
 command to DB 44 accompanied by the ID of the serv-
 ice provider whose database 300-301 is being adminis-
 tered, the ID of the base station 20-24, through which
 the call from the administrator was received (this ID was
 obtained at steps 414-420 of FIG. 4), the location ad-
 dress that was obtained at step 620, and any corre-
 sponding telephone number that was obtained at step
 628, at step 630. DB 44 receives the command and ac-
 companying data, at step 632, and in response creates
 therefrom a database record 302 and stores it in the one
 database 300-301 that is being administered, at step
 634.

Of course, various changes and modifications to the
 illustrative embodiment described above will be appar-
 ent to those skilled in the art. For example, a different
 mobile communications terminal, such as a portable
 computer equipped with a wireless modem, for exam-

ple, may be used instead of a mobile telephone. Such changes and modifications can be made without departing from the spirit and the scope of the invention and without diminishing its attendant advantages. It is therefore intended that such changes and modifications be covered by the following claims.

Claims

1. A dealer locator apparatus for a mobile communications system (FIG. 1) that includes at least one mobile communications station (40) and a plurality of base stations (20-24) each for communicating with mobile communications stations in a different geographical area (10-14), for serving a plurality of business locations (30-33, 50-52) of a service provider located in a plurality of the geographical areas, the apparatus comprising:

first means (41, 42) responsive to a communication from one mobile communications station and identifying the service provider, for determining which one of the plurality of base stations is presently communicating with the one mobile communications station;
second means (43, 44) responsive to the determination of the base station, for determining which one of the plurality of business locations is within a vicinity of the one base station; and
third means (41, 43) responsive to the determination of the business location, for at least one of (a) causing the determined business location to be reported to the one mobile communications station, and (b) causing the communication from the one mobile communications station to be extended to the determined business location.

2. The apparatus of claim 1 wherein

the second means comprise:
a database (44) whose contents correlate the base stations each with at least one of the business locations in the vicinity of the base station; and
means (43) responsive to the determination of the one base station, for determining from the contents of the database a business location that is correlated with the one base station.

3. The apparatus of claim 2 wherein:

the database contents correlate the base stations each with at least one of (a) an address (304) and (b) a telephone number (305), of at least one of the business locations in the vicinity of the base station; and

the third means comprise

means (41, 43) for at least one of (a) reporting the address of the determined business location to the one mobile communications station, and (b) extending the communication from the one mobile communications station to the telephone number of the determined business location.

4. The apparatus of claim 2 further comprising:

means (41, 42) responsive to a communication, from an individual mobile communications station (40) presently located at an individual one of the business locations, identifying the individual one of the business locations and indicating administration of the service provider, for determining an individual one of the plurality of base stations that is presently communicating with the individual mobile communications station; and
means (43, 44) responsive to the determination of the individual one of the plurality of base stations, for storing in the database a correlation of the individual one of the plurality of base stations with the individual one of the business locations.

5. The dealer locator apparatus of claim 1 for serving a plurality of business locations, each having at least one of (a) an address and (b) a telephone number associated therewith, wherein:

the first means include
a switching center (41) connected to the plurality of base stations and to the second means, responsive to receipt of a first call from one mobile communications station identifying the dealer-locator service, for determining an identity of the base station through which the first call was received, and extending the first call to the second means;
the second means are responsive to the extended first call, for determining, from the identity of the base station through which the first call was received, which one of the business locations is within a vicinity of the base station through which the first call was received; and
the third means include
means (43) connected to the switching center, responsive to the determination of the one of the business locations, for at least one of (a) reporting the address of the one of the business locations through the extended first call to the one mobile communications station, and (b) causing the switching center to redirect the extended first call to the telephone that is associated with the one of the business locations.

6. The apparatus of claim 5 wherein:

the switching center (41) is responsive to receipt of a second call, from an individual mobile communications station (40) that is presently located at an individual one of the business locations, indicating administration of the dealer-locator service apparatus, for determining an identity of the base station through which the second call was received, and extending the second call to the dealer-locator service apparatus;

the dealer-locator service apparatus comprises means (43) responsive to the extended second call, for determining via the extended second call from the individual mobile telephone at least one of (a) the address and (b) the telephone number, of the individual one of the business locations, and

means (44) for storing the at least one of the address and the telephone number in association with the identity of the base station through which the second call was received; and the second means are responsive to the extended first call, for using the identity of the base station through which the first call was received to retrieve, from the stored associations, the at least one of the address and the telephone number that is associated with the base station through which the first call was received.

7. A method of effecting a dealer-locator service in a mobile communications system (FIG. 1) that includes at least one mobile communications station (40) and a plurality of base stations (20-24) each for communicating with mobile communications stations in a different geographical area (10-14), wherein a plurality of business locations (30-33, 50-52) of a service provider are located in a plurality of the geographical areas, the method comprising the steps of:

in response to a communication from one mobile communications station and identifying the service provider, determining (400-404) which one of the plurality of base stations is presently communicating with the one mobile communications station;

in response to the determination of the base station, determining (432-438) which one of the plurality of business locations is within a vicinity of the one base station; and

in response to the determination of the business location, at least one of (a) causing (440-442) the determined business location to be reported to the one mobile communications station, and (b) causing (458-462) the commu-

nication from the one mobile communications station to be extended to the determined business location.

8. The method of claim 7 wherein

the step of determining which one of the plurality of business locations is within a vicinity of the one base station comprises the step of: in response to the determination of the one base station, determining (434-436) a business location that is correlated with the one base station from the contents of a database (44) whose contents correlate the base stations each with at least one of the business locations in the vicinity of the base station.

9. The method of claim 8 wherein:

the database contents correlate the base stations each with at least one of (a) an address (304) and (b) a telephone number (305), of at least one of the business locations in the vicinity of the base station; and the step of at least one of reporting and extending comprises the step of at least one of (a) reporting (440-442) the address of the determined business location to the one mobile communications station, and (b) extending (458-462) the communication from the one mobile communications station to the telephone number of the determined business location.

10. The method of claim 8 further comprising the steps of:

in response to a communication, from an individual mobile communications station presently located at an individual one of the business locations, identifying the individual one of the business locations and indicating administration of the service provider, determining (600, 400-404) an individual one of the plurality of base stations that is presently communicating with the individual mobile communications station; and

in response to the determination of the individual one of the plurality of base stations, storing (423, 602-634) in the database a correlation of the individual one of the plurality of base stations with the individual one of the business locations.

FIG. 1

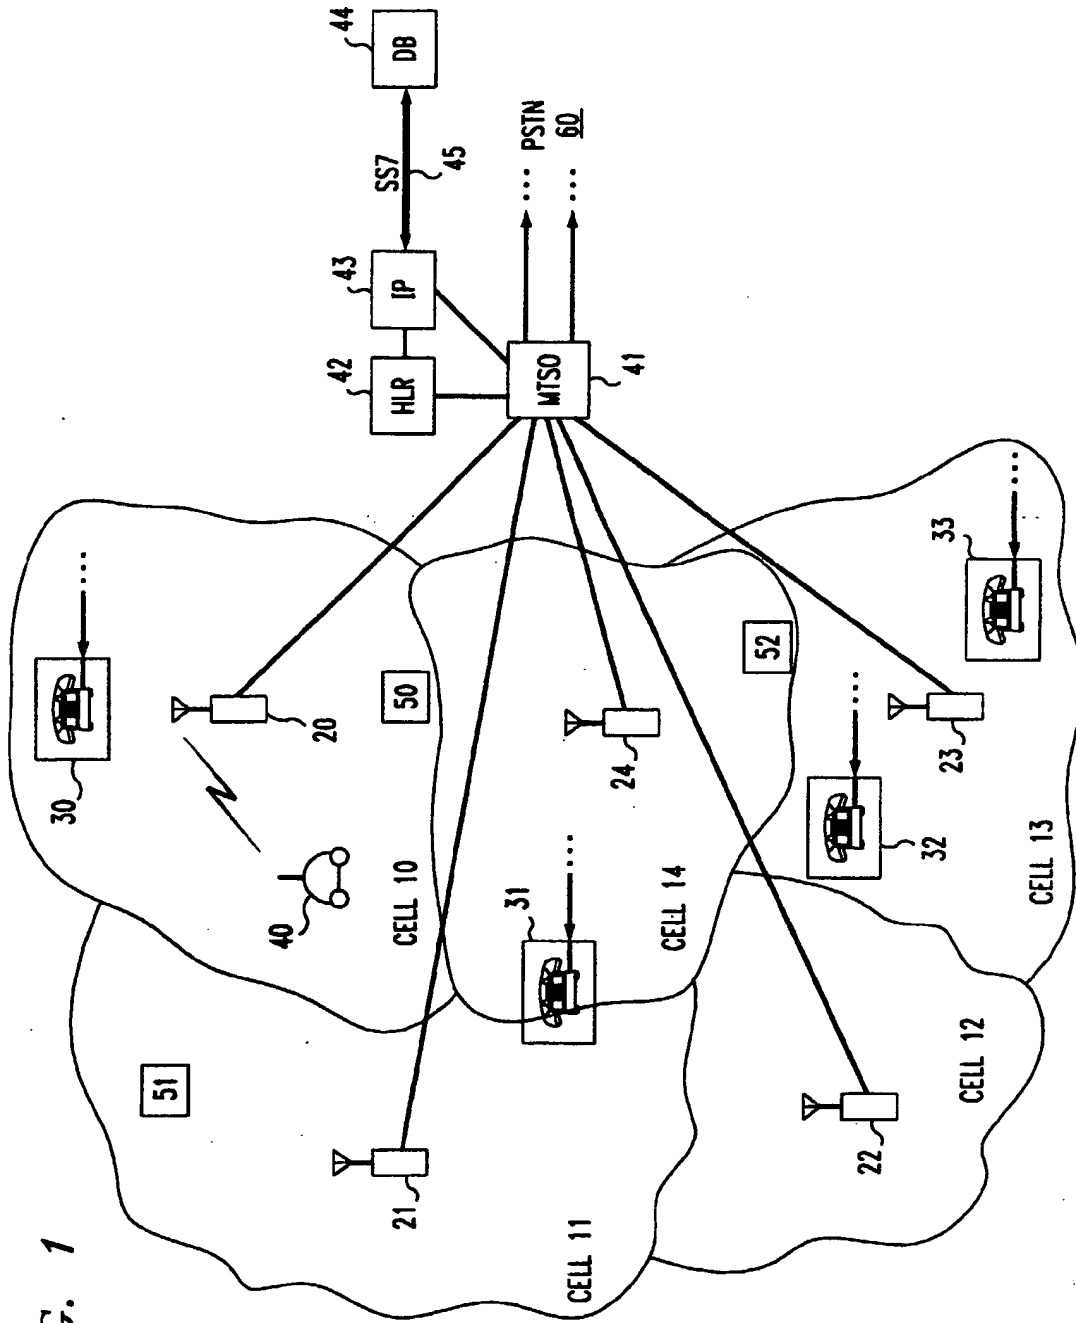


FIG. 2

42			
	CALL ID	CALLING/CALLED NUMBER	BASE STATION ID
	201		
⋮	⋮	⋮	⋮
202			
203			
204			

FIG. 3

300	SERVICE PROVIDER ID 5		
	SERVICE PROVIDER ID 3		
	BASE STATION ID	SERVICE PROVIDER ADDRESS	PHONE NUMBER
302	20	" - - - - "	30
	21	" - - - - "	31
⋮	22	" - - - - "	32
	23	" - - - - "	32
	23	" - - - - "	33
302	24	" - - - - "	31
	303	304	305

FIG. 4

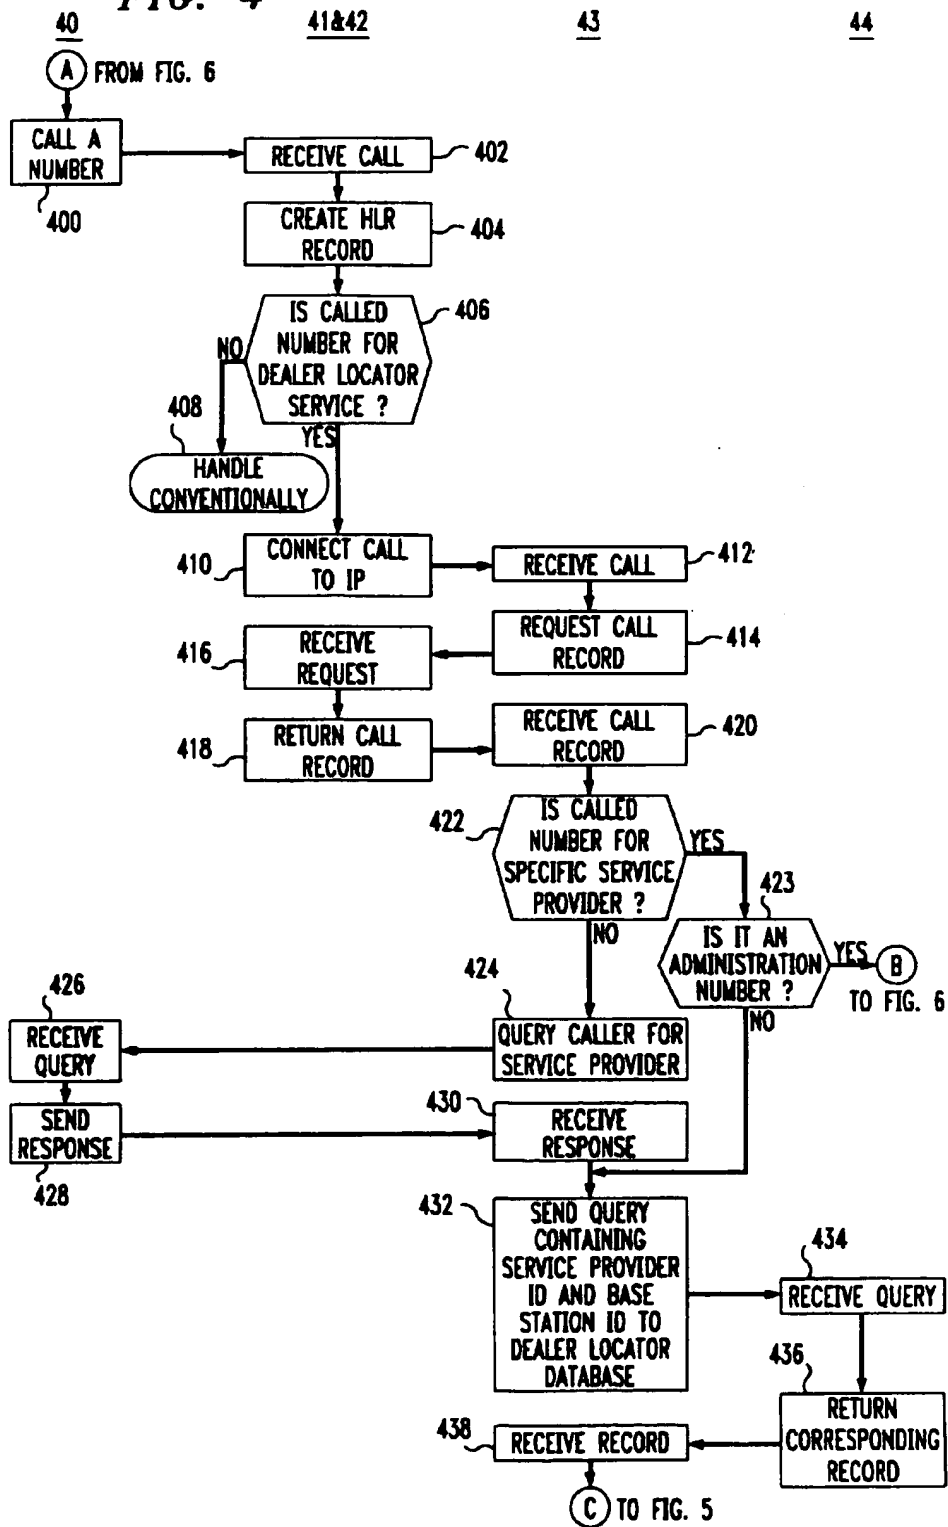


FIG. 5

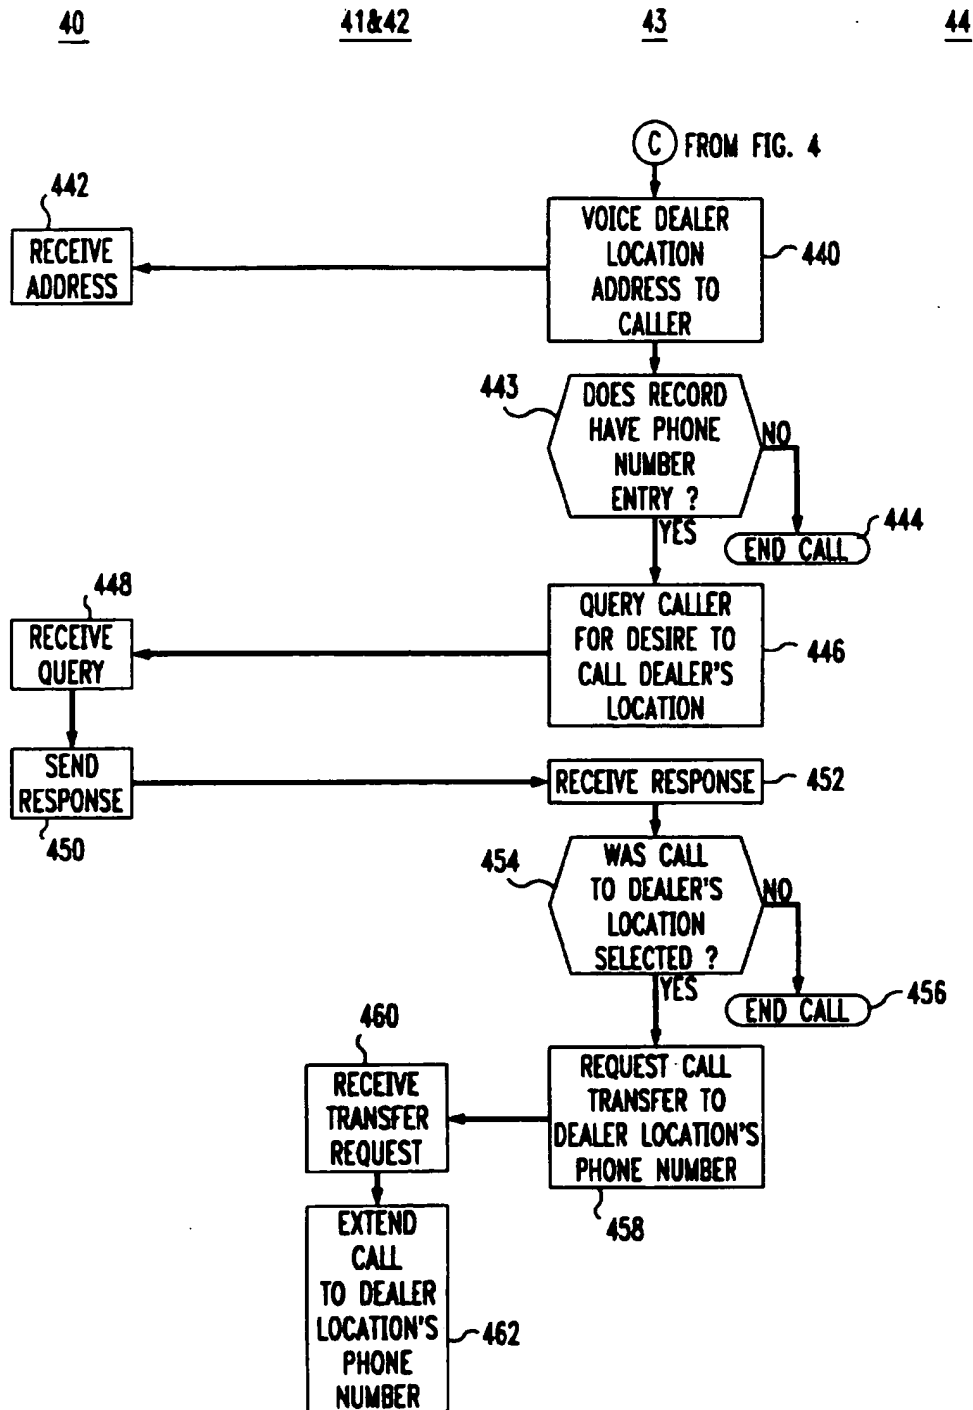


FIG. 6

